

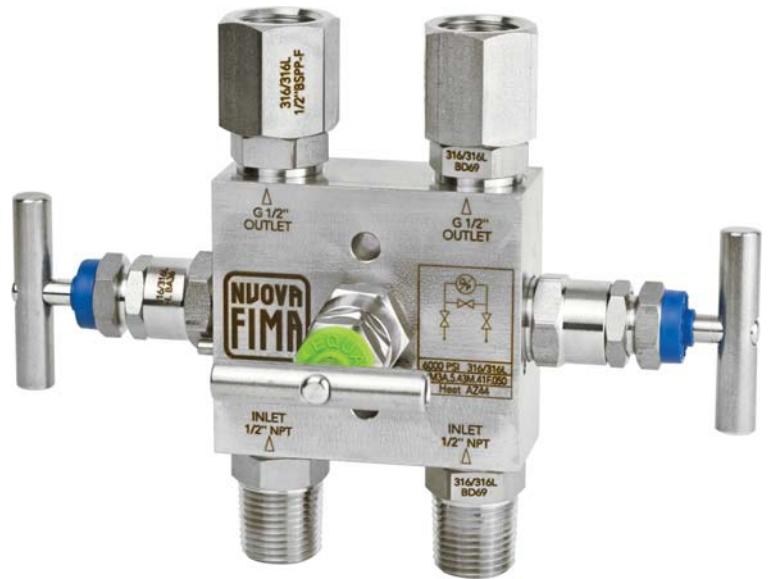


## bar stock three-valve manifold, block and equalizer, direct mounting




### Technical features

- Rating:** 6000 psig; or 10000 psig (code **10K**).
- Tee-bar:** AISI 303 st.st.
- Stem:** AISI 316 L st.st.
- Non-rotating needle:** AISI 316 L st.st (code **5**), (or special materials).
- Bonnet:** AISI 316 L st.st (code **5**), (or special materials).
- Packing:** PTFE or Graphoil (see chart below).
- Nuts:** carbon steel.
- Line dust cup:** Hytrel, blu.
- Equalizer dust cup:** Hytrel, green.
- Bonnet seal:** AISI 316L st.st. seal.
- Manifold body and drain plug:** AISI 316 L st.st. (code **5**), (or special materials).
- Weight:** 1,45 kg.

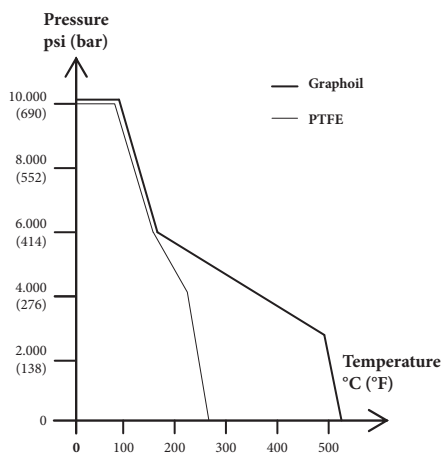

5.M3A - BSM/M3A - male process connection

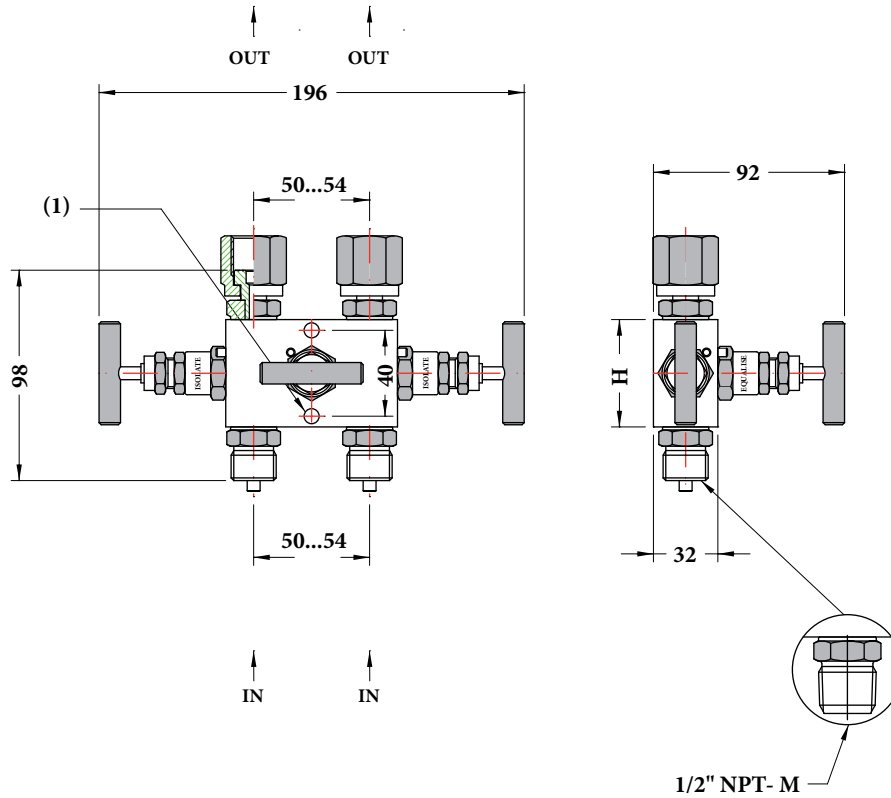

Code	IN-OUT	H	L
41M x 41F	G 1/2" A x G 1/2"	70	20
43M x 41F	1/2" NPT x G 1/2"	70	20

(1) No. 2 fixing holes  $\phi$  7 mm

dimensions : mm

**OPTIONS**

<b>10K</b> -Rating bonnet : 10000 psi	<b>LOK</b> - T-Bar handle locking
<b>ANT</b> - Anti-tamper	<b>P02</b> - Oxygen service
<b>E30</b> - NACE version as per MR 0103/0175-ISO15156	<b>SMI</b> - Tag
<b>GRA</b> - Graphoil packing	<b>TB6</b> -

**"HOW TO ORDER" SEQUENCE**

Section / Model / Material / Process connection / Instrument connection / Interaxis / Options  
 5 M3A 5 41M 41F 050 10K...SMI  
 43M 054